




**BORMA WACHS**<sup>®</sup>  
Wood Professional Cosmetics

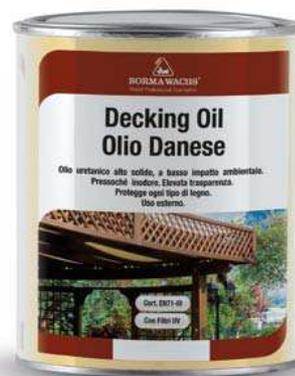

## Technical Data Sheet

00 of 20.10.2012

# DECKING OIL

## Danish Oil

### DESCRIPTION:

DECKING OIL is a mixture of natural oils, modified with an urethane resin, special for the treatment of outdoor wooden surfaces, such as garden furniture, doors, fences, decks, boats and similar.

Its particular formulation nourishes and protects wood enhancing its natural beauty, while the resins improve the protective effect, making it resistant to water and weathering.

Enriched with UV filters, it keeps wood from turning gray, and makes it appear alive and vibrant in tone. It's perfect for garden furniture, store-houses and pergolas.

Attention: exotic or heavy colored woods can inhibit or slow down a lot the drying process.

### PHYSICAL – CHEMICAL CHARACTERISTICS:

<b>Composition:</b>	Urethanic oil with high solid content
<b>Form:</b>	Oily liquid
<b>Odour:</b>	Typical
<b>Solubility in water:</b>	Insoluble
<b>Dilution:</b>	Solvoil 04 or Solvoil Plus
<b>Yield:</b>	10/12 m <sup>2</sup> /L
<b>Drying time:</b>	8-12 hours at 20°C
<b>Total drying time:</b>	24 hours at 20°C

### HOW TO USE:

Ready-to-use product for all unfinished wood surfaces, can be applied by spray, brush or roller. After ensuring that the surface is free of impurities, apply preferentially three or at least two coats of the product at an interval of at least 8/12 hours to let the first coat dry.

On difficult exotic woods (for a better drying process of the first coat), evaluate the chance of a 20% dilution with Solvoil 04, then spread a thin layer uniformly.

Treated surfaces, if required, can be wax finished or over-painted after a proper sanding process.

### PACKAGING:

The product comes in Lt. 1, Lt. 2,5, Lt. 5, Lt. 10 and Lt. 20.



**BORMA WACHS**<sup>®</sup>

Wood Professional Cosmetics

**STORAGE:**

Store in a cool, well ventilated place, keep the container closed when not used. Keep away from heat, flames, sparks and other sources of ignition.

**WARNING:**

Sawdust, cotton cloth, paper and similar products soaked with liquid product and left in such condition may cause spontaneous combustion. Therefore, in case of presence of these materials for cleaning, ensure adequate air ventilation of the rooms in order to allow a rapid drying of the product or wet them with water before disposal.

Our data sheets are prepared on the basis of average performance of our tests. However, our technical advices are given in good faith but without any warranty. In fact different supports, conditions of application, industrial plants, dilutions are determinant for the final result, and are often beyond our control. The user must try the product to see if it is suitable for his needs. We will ensure the continuity of the chemical-physical characteristics.